



PAN-S18

Tehničke karakteristike proizvoda




PANKOMERC

Čarobjaci za lim®

Pan-S18

Pan-S18 je plitki sinusno profilisani lim dubine 18 mm koji se najviše upotrebljava u oblaganju fasada ili elemenata enterijera. Proizvodi unikatan efekat na svakoj površini.

Ovaj proizvod se može izraditi od pocinkovanog i aluminijumskog lima.

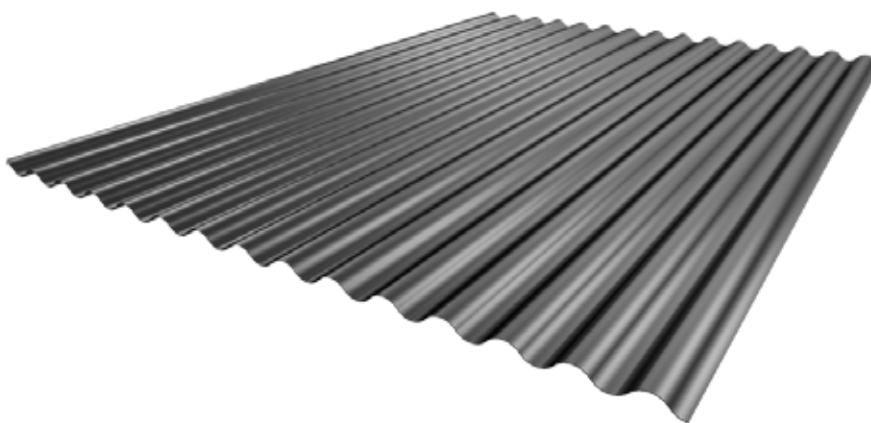

Na proizvod se može postaviti antikondenz filc



Proizvod se može savijati lučno




Proizvod može biti perforiran




Proizvod može biti izrađen od transparentnog polikarbonata

KROVNO PROFILISANJE

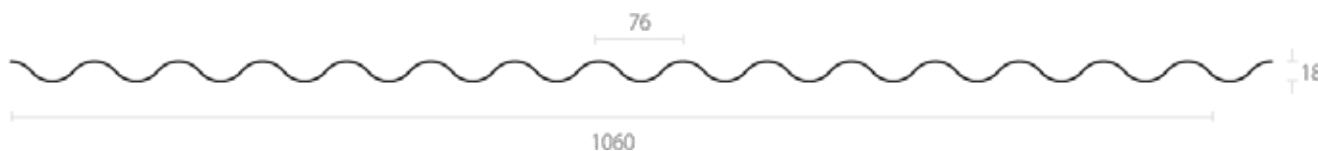

FASADNO PROFILISANJE

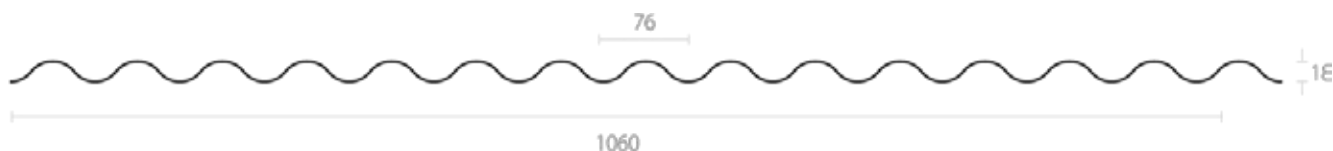

Osnovni podaci


Dužina	0,2 - 9 m
Raspon	do 2,3 m
Debljina čelika	0,5 - 0,8 mm
Debljina aluminijuma	0,7 - 1,0 mm



Tabela težine

Debljina lima	Težina po kg/m ²	
0,5	4,70	x
0,6	5,66	x
0,7	6,60	2,23
0,8	7,54	2,55
1,0	x	3,18


■ Pocinkovani lim ■ Aluminijumski lim

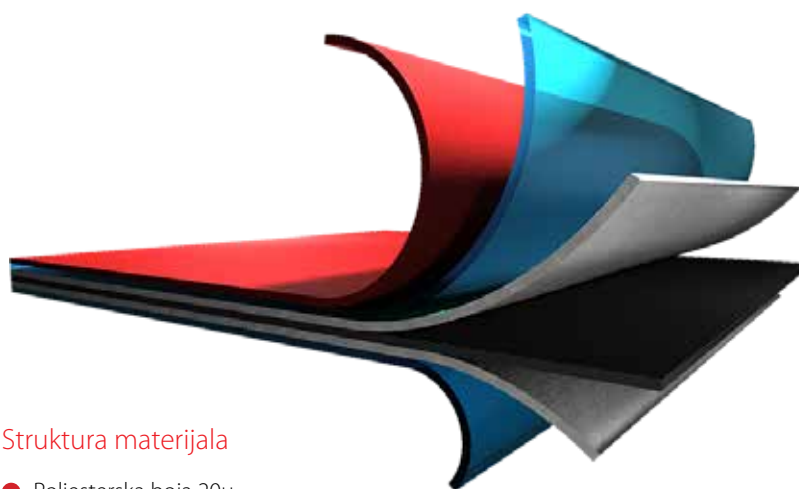

Struktura materijala

- Poliesterska boja 20μ
- Osnovna boja (prajmer) 7μ
- Cink 140 gr/m²
- Čelik DX51 (0,5mm)


* Vrednosti se mogu menjati po zahtevu

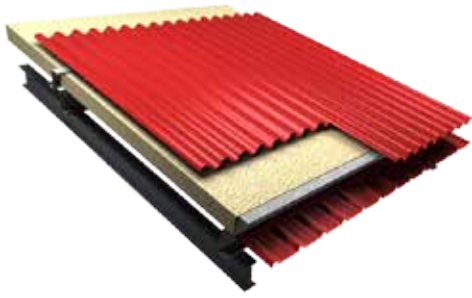


PRIMER KROVNE MONTAŽE




PRIMER FASADNE MONTAŽE




PRIMER FASADNE MONTAŽE

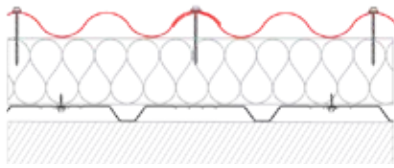

KROVNO PROFILISANJE
PRESEK MONTAŽE



FASADNO PROFILISANJE
PRESEK HORIZONTALNE MONTAŽE

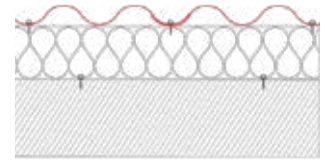

FASADNO PROFILISANJE
PRESEK VERTIKALNE MONTAŽE

Tabele nosivosti

TABELA NOSIVOSTI PAN-S18- POCINKOVANI LIM

Debljina (mm)	Dužina (cm ² /m)	Dužina (cm ² /m)	Opterećenje (kN/m ²)	Razmak rožnjače l (m) kod maksimalnog ugiba f _{max} ≤ l/200 l dozvoljenog napona Σ f _{doz} = 14 kN/cm ²		
				▲▲	▲▲▲	▲▲▲▲
50	3,06	2,40	1,00	1,35	1,64	1,68
			1,25	1,25	1,46	1,56
			1,50	1,18	1,34	1,47
			1,75	1,12	1,25	1,38
0,60	3,66	2,86	1,00	1,43	1,79	1,78
			1,25	1,33	1,60	1,65
			1,50	1,25	1,46	1,56
			1,75	1,19	1,35	1,48
0,70	4,26	3,31	1,00	1,51	1,92	1,87
			1,25	1,40	1,72	1,74
			1,50	1,32	1,57	1,64
			1,75	1,25	1,45	1,56
0,80	4,86	3,76	1,00	1,57	2,05	1,96
			1,25	1,46	1,83	1,82
			1,50	1,38	1,67	1,71
			1,75	1,30	1,55	1,63

▲▲▲ BROJ OSOLONACA

TABELA NOSIVOSTI PAN-S18 - ALUMINIJUMSKI LIM

Razmak oslonaca (m)	Debljina lima (mm)	Razmak rožnjače l (m) kod maksimalnog ugiba f _{max} ≤ l/200 l dozvoljenog napona Σ f _{doz} = 14 kN/cm ²		
		▲▲	▲▲▲	▲▲▲▲
1,00	0,7	84	202	160
	0,8	96	252	182
	1,0	120	289	228
1,25	0,7	43	104	84
	0,8	49	117	93
	1,0	61	147	116
1,50	0,7	25	60	47
	0,8	27	65	51
	1,0	26	87	68
1,75	0,7	16	39	30
	0,8	18	43	34
	1,0	22	53	42
2,00	0,7	10	25	20
	0,8	12	29	23
	1,0	15	36	28

Ton karta standardnih boja

Boja	RAL oznaka	Sinusni lim PAN-S18	
		Pocinkovani	Aluminijumski
Srebrna metalik	9006	•	•
Tamno siva	9007	•	•
Alpsko bela	9002	•	•
Prljivo bela	9003	•	•
Antracit	7016	•	•
Crna	9005	•	•
Zemlja braon	8019	•	•
Vatreno crvena	3020	•	•
Cigla crvena	3009	•	•
Stepsko zelena	6021		•
Šumsko zelena	6028	•	•
More plava	5010	•	•
Cigla crvena MAT	3009	•	
Amazon zelena MAT	6020	•	
Antracit MAT	7016	•	•
Kafa braon MAT	8017	•	
Crna MAT	9005	•	
Titan cink		•	•
Lamelirane folije	Imitacija drveta	•	
Lamelirane folije	Imitacija bakra	•	•

Ostale boje i parametri mogu se dobiti po zahtevu.



PANKOMERC

Čarobnjaci za lim®

Knjaza Miloša 92/1
(Poštanski fah 67)
31 210 Požega, Republika Srbija

Veleprodaja

tel. +381 (0)31 812 225
fax +381 (0)31 3716 091


Maloprodaja i logistika

tel. +381 (0)31 825 058
fax +381 (0)31 825 458
e-mail: info@pankomerc.com

Predstavništvo u Beogradu

Mije Kovačevića 10a
(stovarište Inkotehna)
11 000 Beograd
tel. +381 (0)11 27 64 491
e-mail: beograd@pankomerc.com

www.pankomerc.com

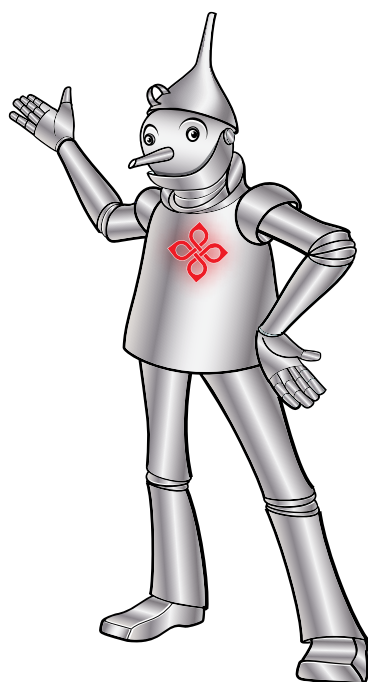

RoHS